BLUE ANGEL READY, COME HELL OR HIGH WATER PLIMPS

CAST IRON SUMP PUMP

CONSTRUCTION

Durable Epoxy-Coated Cast Iron Housing/Volute

▶ Top Suction Design Eliminates Air Lock and Minimizes Clogging from Debris in the Bottom of the Sump Pit

 Reliable Thermoplastic Impeller for Maximum Water Flow

 1-1/2 in. NPT Discharge for Easy Installation and Compliance with Building Codes

▶ For Use In 11 in. Diameter or Larger Sump Basins

▶ 8 ft. SJTW Power Cord

BENEFITS

▶ This pump delivers unsurpassed protection. The switch is tested 1,000,000 times, up to 10X times more than competitors.

▶ This pump is assembled in the USA to deliver dependable performance that lasts for years.


This pump is easy to install. Start to finish in about 15 minutes.

Air Lock can burn out your pump. This pump is precision engineered to eliminate Air Lock.





● F50CIS ● F33CIS

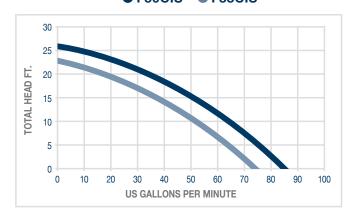

CORROSION RESISTANT CONSTRUCTION WITH TOP SUCTION DESIGN TO MINIMIZE CLOGGING

MODEL: F33CIS, 1/3 HP | F50CIS, 1/2 HP

PUMP SNAPSHOT

- ▶ HP F33CIS, 1/3 HP | F50CIS 1/2 HP
- ▶ Construction Durable Epoxy-Coated Cast Iron
- ▶ **Switch Type** Integrated Vertical Float Switch
- ▶ Motor 120 Volt, PSC Oil-Filled Motor
- ▶ Impeller Centrifugal
- ▶ Intake Top Suction
- ▶ Discharge 1 1/2 In. NPT
- > Submersible Yes
- **F33CIS UPC** 040066217899
- **F50CIS UPC** 040066217905



- ▶ Length 10 1/2 In.
- → Width 9 In.
- ▶ Height 11 In.
- ▶ Weight 23 Lbs.
- **▶ Power Cord** 8 Ft.

B-DRY of Western Ohio & Monroe, MI Complete Foundation Services, LLC (419) 891-0856

www.bdrynwohio.com

PERFORMANCE

- F33CIS 1/3 HP Max Flow 77 GPM: 51 GPM @ 10'
- ▶ **F50CIS** 1/2 HP Max Flow 85 GPM: 64 GPM @ 10'

FLOW RATES:

MODEL:F33CIS - 1/3 HP	GPM @ 5'	GPM @ 10'	GPM @ 15'	GPM @ 20'
Gal/Min @ 0 MAX Flow 77	64	51	37	20
MODEL:F50GIS - 1/2 HP	GPM @ 5'	GPM @ 10'	GPM @ 15'	GPM @ 20'

3 YEAR LIMITED WARRANTY

▶ Assembled in USA with Foreign and Domestic Parts







